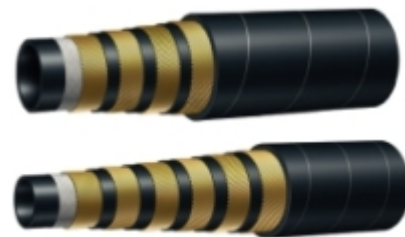


WIRE SPIRAL

809AA
FLEXOR 13 MSHA
SAE 100 R13 - EN 856 R13


Tube	OIL RESISTANT SYNTHETIC RUBBER
Reinforcement	FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER
Application	VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +121°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random up to 1" - 40 m max over 1"
Branding	ALFAGOMMA FLEXOR 13 DN ... - ID ... - WP ... BAR - ... PSI - USMSHA IC-152/8 - MADE IN ITALY - Q/yr
Note	S.F.: 4:1

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
809AA02000ARB8	4S	19	3/4	-12	32,1	1,26	35	5000	140	20000	241	9,6	1,6	107
809AA02500ARB8	4S	25	1	-16	38,7	1,52	38	5500	152	22000	305	12,2	2	134
809AA03200ARB8	6S	32	1.1/4	-20	49,8	1,96	35	5000	140	20000	419	16,8	3,6	241
809AA03800ARB8	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	508	20,3	4,8	322
809AA05100ARB8	6S	51	2	-32	70,9	2,79	35	5000	140	20000	635	25,4	6,6	442