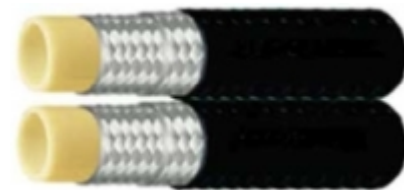


8G0LA
FLEXOR 7 - TWIN
SAE 100 R7 - EN 855 R7


Tube	THERMOPLASTIC POLYESTER
Reinforcement	Two high tensile textile braids and two tensile steel braids
Cover	ABRASION, OZONE AND HYDROCARBON RESISTANT THERMOPLASTIC POLYURETHANE-PIN PRICKED
Application	HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.
Constant operation	-40°C +93°C
Ambient temperature	-40°C +80°C
Fittings	Consult fittings catalogue
Length	Random
Branding	
Note	S.F.: 4:1

Code	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
8G0LA00500AG00	5	3/16	-3	9,6	0,38	21	3000	84	12000	75	3	0,13	9
8G0LA00600AG00	6	1/4	-4	12,2	0,48	21	3000	84	12000	100	4	0,19	13
8G0LA00800AG00	8	5/16	-5	14,4	0,57	17,5	2500	70	10000	115	4,6	0,25	17
8G0LA01000AG00	10	3/8	-6	15,9	0,63	15,5	2250	62	9000	125	5	0,29	19
8G0LA01200AG00	13	1/2	-8	20,3	0,8	14	2000	56	8000	175	7	0,43	29