

DC-70PH PLUS

For Earth, For Life
Kubota


Combine Harvester For Rice



OUTSTANDING FEATURES

STRENGTHENED UNDER PLATE MATERIALS

- Made of high tension steel
- 1.4 to 2 times more durable than the current material

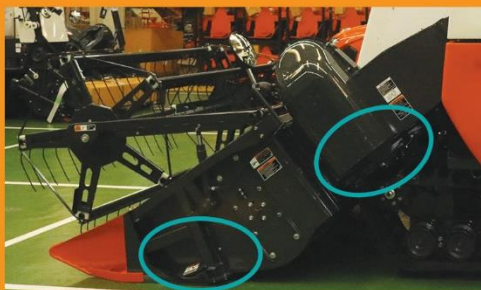

REDUCED POSSIBILITY OF DOWNTIME


- Enhanced screw shape of cutting auger



- Enhanced design of inner packaging of finger guide
- Enhanced design of feeder chain sprocket (increased durability 1.5 times)

INCREASED DURABILITY

- Improved "structured cutting arm" durability of up to 1.5 times
- Improved design of rear tension roller

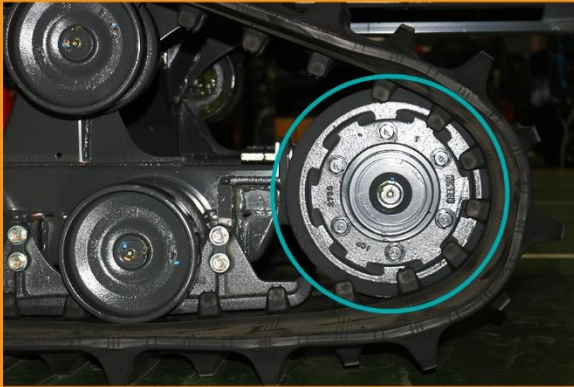

EASY OPERATION

- Attached spherical mirror at the left side of the header



- Better position of the breaker switch - at the left side of the hydrostatic transmission (HST) lever
- Better position of the external power coupler - at the left rear side of the driving seat

SPECIFICATIONS

Dimensions	Length		mm	4800	
	Width		mm	2245	
	Height		mm	2800	
Weight			kg	3000	
Engine	Model			V2403-M-DI-TE-CS4T	
	Displacement		L	2.434	
	Output		kW[PS]/rpm	50.7[69.0]/2700	
Track	Crawler	Width x Length	mm	500 x 1700	
	Contact Pressure		kPa	17.3	
	Minimum Ground Clearance		mm	325	
	Transmission			HST (27cc/rev)	
	Speed	Low		m/s	0 - 0.97
			Middle	m/s	0 - 1.37
			High	m/s	0 - 1.86
Turning System				Clutch and Break by 1 Lever	
Cutting	Cutting Width		mm	2075	
	Reel	Rotation Diameter x Tine Bars	mm x pieces	900 x 5	
Threshing	Drum	System		Axial Flow Type	
		Type of Threshing Bars		Round Bar Rowing Teeth	
		Diameter x Length	mm	620 x 1650	
	Concave		pieces	4 (180°)	
	Selection	Width x Length	mm	840 x 1375	
	Selection				3-Way Air Stream
Hopper	Loss Ratio			Less than 3%	
	Capacity		L	500	
	Outlet			2	

KUBOTA Philippines, Inc.

Manila Head Office:

232 Quirino Highway, Baesa, Quezon City, Metro Manila
Tel. Nos.: (632) 4223500 to 03; Fax Nos.: (632) 4223504 to 03
E-mail: kpi_g.kpi@kubota.com

Davao Branch:

1 Yuta@Dabaw Bldg., Purok 38, Diversion Road, Ma-a, Davao City 8000
Tel. Nos.: (082) 2828160 to 61

Website: www.kubota.com.ph

Authorized Dealer: