




Leading - edge Technology

- ▶ High efficiency of 97.8% delivery more energy
- ▶ Integrated DC disconnect switch
- ▶ Consistent and stable performance across entire input voltage and output power range
- ▶ Intelligent temperature management
- ▶ Power balancer for three-phase grid connection
- ▶ Bluetooth / RF technology / Wi-Fi
- ▶ Sound control, easy installation maintenance procedure
- ▶ Newest generation IGBTs and advanced MPPT algorithms

11k efficiency

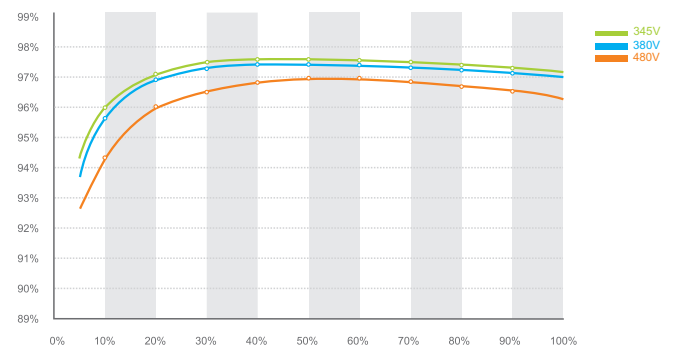

GROWATT NEW ENERGY TECHNOLOGY Co.,LTD

A: Building B, Jiayu Industrial Zone, #28 Guanghui Road, Longteng Community, Shiyan, Baoan District, Shenzhen, P.R.China.

T: + 86 755 2747 1900 F: + 86 755 2749 1460 E: info@ginverter.com

	Growatt 8000TL-US	Growatt 9000TL-US	Growatt 10000TL-US	Growatt 11000TL-US
Input Data				
Max. DC power	8300W	9300W	10350W	11400W
Max. DC voltage	600V	600V	600V	600V
Start voltage	360V	360V	360V	360V
DC nominal voltage	345V@208VAC 379V@240VAC	345V@208VAC 379V@240VAC	345V@208VAC 379V@240VAC	379V
PV voltage range	300-600V@208VAC 345-600V@240VAC	300-600V@208VAC 345-600V@240VAC	300-600V@208VAC 345-600V@240VAC	345-600V
MPP voltage range	300-480V@208VAC 345-480V@240VAC	300-480V@208VAC 345-480V@240VAC	300-480V@208VAC 345-480V@240VAC	345-480V
Number of independent MPP trackers/strings per MPP tracker	1 / 2	1 / 2	1 / 2	1 / 2
Max. input current / per string	30A / 30A	33A / 33A	36A / 36A	35A / 35A
Output (AC)				
Rated AC output power	8000W	9000W	10000W	11000W
Max. output current	44A@208VAC 38A@240VAC	48A@208VAC 43A@240VAC	49A@208VAC 48A@240VAC	48A
AC nominal voltage; range	Default:240V optional:208,240 single phase 183-228@208V 211-264V@240V			240V / 211~264V
AC grid frequency; range	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz	60Hz;59.3-60.5Hz
Power factor	1	1	1	1
THDI	<3%	<3%	<3%	<3%
AC connection	Two phase	Two phase	Two phase	Two phase
Efficiency				
Max. efficiency	97.8%	97.8%	97.8%	97.5%
CEC. efficiency	97%	97%	97%	97%
MPPT efficiency	99.5%	99.5%	99.5%	99.5%
Protection Devices				
Electronics string fuse	yes	yes	yes	yes
DC reverse-polarity protection	yes	yes	yes	yes
Input over voltage protection-Varistor	yes	yes	yes	yes
DC insulation measure	yes	yes	yes	yes
AC short circuit protection	yes	yes	yes	yes
Output over voltage protection-Varistor	yes	yes	yes	yes
General Data				
Dimensions (W / H / D) in mm	469/746/248	469/746/248	469/746/248	469/746/248
Weight	40KG	40KG	40KG	40KG
Operating temperature range	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +60 °C
Noise emission	< 46 dB	< 46 dB	< 46 dB	< 46 dB
Consumption: operating (standby) / night	< 5W / < 0.5 W	< 5W / < 0.5 W	< 5W / < 0.5 W	< 5W / < 0.5 W
Topology	Transformerless	Transformerless	Transformerless	Transformerless
Cooling concept	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Electronics protection rating /connection area	NEMA 3R	NEMA 3R	NEMA 3R	NEMA 3R
Altitude	2000m without derating	2000m without derating	2000m without derating	2000m without derating
Relative Humidity	0~95%	0~95%	0~95%	0~95%
Features				
Display	LCD	LCD	LCD	LCD
Interfaces: RS232/RS485/Bluetooth/Wi-Fi	opt / yes / opt / opt / opt	opt / yes / opt / opt / opt	opt / yes / opt / opt / opt	opt / yes / opt / opt / opt
Warranty: 10 years / 15 years	yes / opt	yes / opt	yes / opt	yes / opt
Certificates and Approvals				