


# THE TALLMAX<sup>M</sup> PLUS<sup>+</sup>

## 1500V MODULE

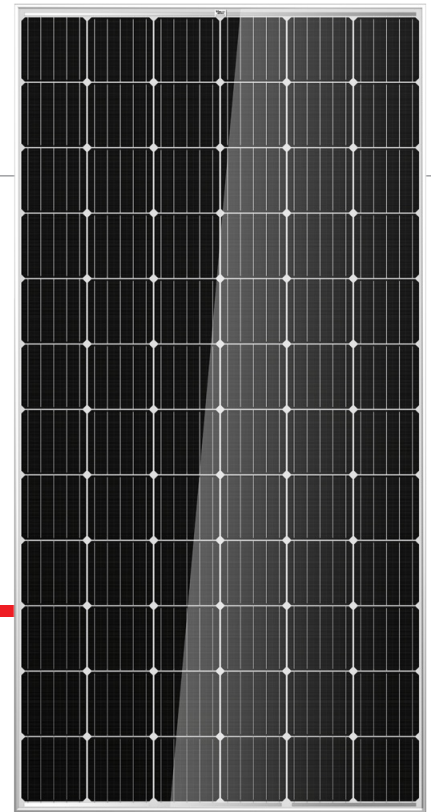

**72 CELL**  
MONOCRYSTALLINE MODULE

**330-355W**  
POWER OUTPUT RANGE

**18.3%**  
MAXIMUM EFFICIENCY


**0~+5W**  
POSITIVE POWER TOLERANCE

As a leading global manufacturer of next generation photovoltaic products, we believe close cooperation with our partners is critical to success. With local presence around the globe, Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners as the backbone of our shared success in driving Smart Energy Together.

Trina Solar Limited  
www.trinasolar.com

### LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty • 25 Year Linear Power Warranty

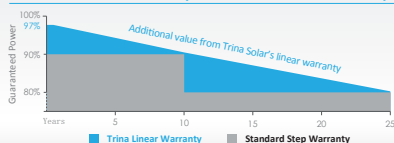

### Ideal for large scale installations

- High power footprint reduces installation time and BOS costs
- UL1500V/IEC1500V certified



### Maximize limited space with top-end efficiency

- Up to 183 W/m<sup>2</sup> power density
- Low thermal coefficients for greater energy production at high operating temperatures



### Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 100% EL double inspection



### Certified to withstand challenging environmental conditions



- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h

## Comprehensive products and system certificates


- IEC 61215/ IEC 61730/ UL 1703/ IEC 61701/IEC 62716
- ISO 9001: Quality Management System
- ISO 14001: Environmental Management System
- ISO 14064: Greenhouse Gases Emissions Verification
- OHSAS 18001: Occupation Health and Safety Management System




**DIMENSIONS OF PV MODULE**  
unit:mm/inch

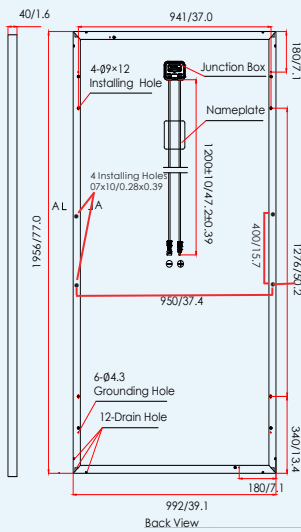

**I-V CURVES OF PV MODULE(355W)**

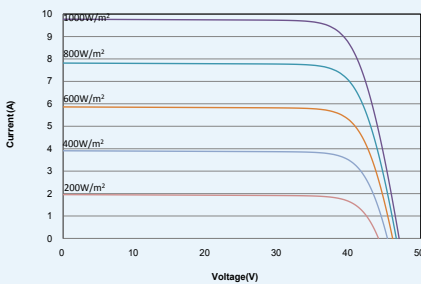

**P-V CURVES OF PV MODULE(355W)**

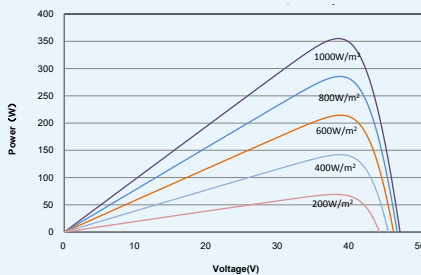

**ELECTRICAL DATA (STC)**

Peak Power Watts- $P_{MAX}$ (Wp)	330	335	340	345	350	355
Power Output Tolerance- $P_{MAX}$ (W)	0~+5					
Maximum Power Voltage- $V_{MPP}$ (V)	37.8	37.9	38.2	38.4	38.5	38.7
Maximum Power Current- $I_{MPP}$ (A)	8.73	8.84	8.90	9.00	9.09	9.17
Open Circuit Voltage- $V_{OC}$ (V)	46.2	46.3	46.5	46.7	46.9	47.0
Short Circuit Current- $I_{SC}$ (A)	9.27	9.36	9.45	9.50	9.60	9.69
Module Efficiency $\eta_m$ (%)	17.0	17.3	17.5	17.8	18.0	18.3

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Maximum Power- $P_{MAX}$ (Wp)	246	250	253	257	261	264
Maximum Power Voltage- $V_{MPP}$ (V)	34.9	35.1	35.2	35.5	35.6	35.8
Maximum Power Current- $I_{MPP}$ (A)	7.04	7.12	7.19	7.25	7.33	7.40
Open Circuit Voltage- $V_{OC}$ (V)	43.0	43.1	43.2	43.4	43.5	43.7
Short Circuit Current- $I_{SC}$ (A)	7.49	7.56	7.63	7.67	7.75	7.82

NOCT: Irradiance at 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline 156 × 156 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1956 × 992 × 40 mm (77.0 × 39.1 × 1.57 inches)
Weight	26.0 kg (57.3 lb)
Glass	4.0 mm (0.15 inches), High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0 mm <sup>2</sup> (0.006 inches <sup>2</sup> ), 1200 mm (47.2 inches)
Connector	MC4 Compatible or Amphenol UTX/H4 (1500V)
Fire Type	Type 1 or Type 2

**TEMPERATURE RATINGS**

Nominal Operating Cell Temperature (NOCT)	44°C (±2°C)
Temperature Coefficient of $P_{MAX}$	-0.39%/°C
Temperature Coefficient of $V_{OC}$	-0.29%/°C
Temperature Coefficient of $I_{SC}$	0.05%/°C

**MAXIMUM RATINGS**


Operational Temperature	-40~+85°C
Maximum System Voltage	1500VDC (IEC) 1500VDC (UL)
Max Series Fuse Rating	15A

**WARRANTY**

10 year Product Workmanship Warranty  
25 year Linear Power Warranty  
(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 26 pieces  
Modules per 40' container: 572 pieces



TSM\_EN\_2016\_B